


Bauseitig 1x Vierkantrohr 1490x100x50
by customer 1x square tube

Betonqualität
quality of concrete
min.20/25
normal bewehrt
normal armouring

Wasserabfluss DN100
empfohlen
Water outlet DN100
recommended

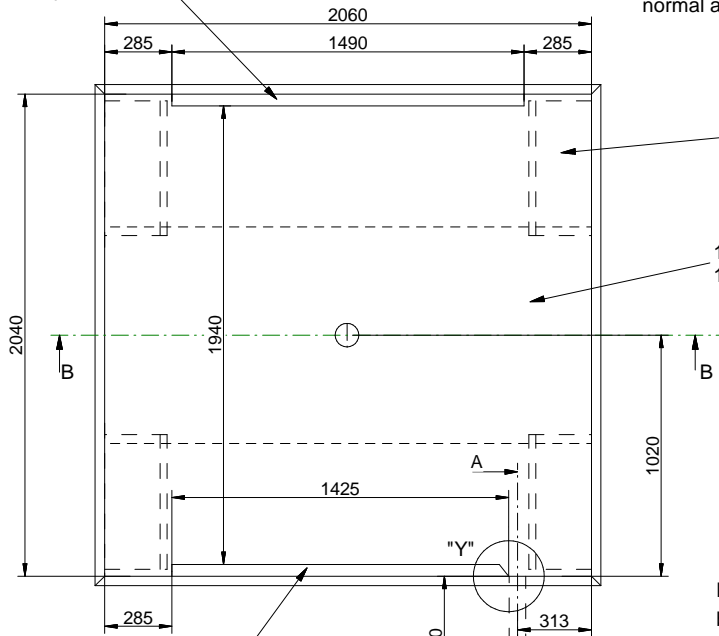


4 St. Rampenkeile (Bestell-Nr. B4560/00)
4 piece ramp wedges (Item-no. B4560/00)

1x mittlere Abdeckung (Bestell-Nr. R1973/00)
1x middle cover (Item-no. R1973/00)


bauseitiger Winkelrahmen
zb. 40x20x5
angle frame by customer

Detail "X"

Bauseitiges Vierkantrohr
by customer square tube



Bauseitiges Vierkantrohr
by customer square tube

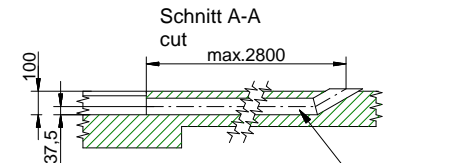

Leerrohr DN75
empty pipe


Bauseitig 1x Vierkantrohr 1425x100x50
by customer 1x square tube

Leerrohr DN75 zum Bedienpult
empty pipe DN75 to the operating unit

Konstruktionstoleranz +/- 0,5 cm
Auf die Genauigkeit des Fundamentes achten!
Construction tolerance +/- 0,5 cm
Pay attention the Foundation levelling

Alle Maße in Millimeter
all dimensions in millimeter

Maß- und Konstruktionsänderungen vorbehalten!
subject to alterations!

				THIRD ANGLE PROJECTION		XS30	
				DO NOT SCALE DRAWING		Foundation Plan	
				UNLESS OTHERWISE SPECIFIED: 0.5mm MIN. CORNER BREAK REMOVE ALL BURRS			
				NOTES:		DRAWN: MG DATE: 14.04.2017 SHEET: _____ APPROVED: _____ DRAWING NUMBER: _____	
				UNLESS OTHERWISE NOTED: ANGULAR DIMENSIONS: +/- 1 - OTHER DIMENSIONS: +/- 0.8mm (<305mm) +/- 1.6mm (>or= 305mm)		The design and detail illustrated in this drawing is the property of Vehicle Service Group. It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.	
REV	CO NUM	DATE	BY	Scissor-Lift_RFP_XS30_8717			