

KINGPIN PRESS

65 T, 215-275 MM CLEAR WIDTH BETWEEN SETBOLTS, HYDRAULIC

The mobile kingpin press BP 65 S3 is a guarantor for fast and safe removal and injection of king- pins. The BP 65 S3 features a sophisticated design in accordance with the latest safety requirements.


- + Easy handling
- + Excellent stability
- + Three-axis quick adjustment

HIGHLIGHTS

Integrated high-pressure pump with two gear ratios for quick and load strokes, filled with 3.5 l hydraulic oil as standard

Great time savings: Easy and quick positioning on the vehicle thanks to the three-axis quick adjustment

Easy handling: Large wheels ensure mobility in the workplace

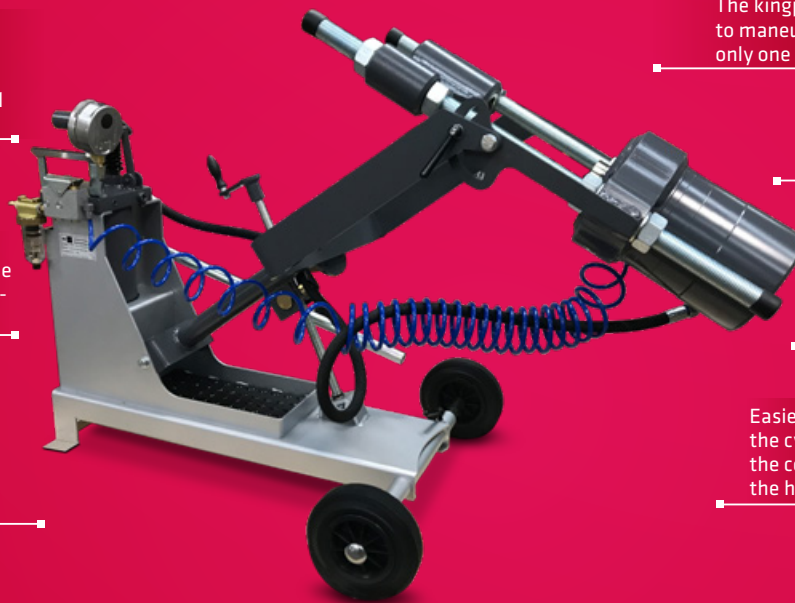




The kingpin BP 65 S3 is easy to maneuver. Operation by only one person is possible

More safety through aligned threaded rods


The press impresses with its compact design and is universally deployable

Easier positioning of the cylinder through the center position of the hand crank

HIGHLIGHTS IN DETAIL



- 1 For fine adjustment, the press can be moved transversely to the axis and additionally secured.
- 2 Cylinder and counter stop are adjustable and lockable with quick release.
- 3 The press frame can be rotated 180 degrees and is lockable.
- 4 Central, large storage compartment for tools.
- 5 Impellers with rubber profile.
- 6 Pressure display by means of pressure gauge and hand lever for the fine stroke.
- 7 Aligned threaded rods guarantee a parallel and angular positioning of the cylinder.
- 8 Quick-stroke valve for fast extension and retraction of the piston rod with condensate separator.
- 9 Pressure tools included in the delivery.

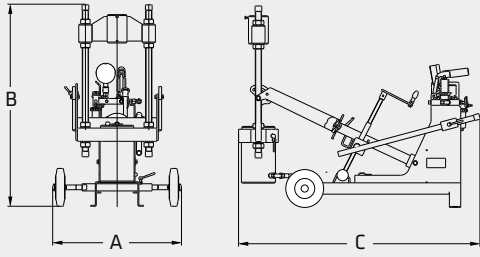BP 65 S3

Model	BP 65-215 S3	BP 65-275 S3	BP 65-215/275 S3
Press force	65 t	65 t	65 t
Piston stroke	120 mm	120 mm	120 mm
Compressed air connection	max. 13 bar	max. 13 bar	max. 13 bar
Operating pressure	420 bar	420 bar	420 bar
A Width	680 mm	680 mm	680 mm
B Height	1065 mm	1065 mm	1065 mm
C Length	1273 mm	1273 mm	1273 mm
Weight	ca. 130 kg	ca. 130 kg	ca. 130 kg
Article number	124525	124526	124527

TECHNICAL SPECIFICATIONS