

MOBILE COLUMN LIFT

WIRELESS, BATTERY OPERATED

The mobile column lifts by Blitz are a perfect synthesis of flexibility and stability. Free areas - make optimum use, both in the workshop as well as outdoors.

- + Nickname "BIG FOOT"
- + Double load protection ensures safety
- + Intuitive operation
- + Quick change of position by forklift possible

The modular design allows the additional expansion from 2 to 3, 4 or a max. of 6 lifting units.

The synchronization control ensures absolute synchronization of all lifting units even with unequal load distribution. The deviation value is only 20 mm.

Double load protection due to continuously adjustable hydraulic safety device (shut-off valve) and self-locking mechanical safety catch.

Hydro Protect: The lifting cylinder is located in the lifting carriage and protected against external influences. The motor and the hydraulic unit are also completely covered.



Emergency stop button on each column.

Symbols that are easy to understand and well-arranged push-buttons facilitate operation. Software updates are initiated via a 2 GB SD card.



The large-volume production in our ISO-certified production facilities allows a consistently high level of vertical integration.

The combination of low-friction rollers and a hydraulic drawbar make it easy to set up the workplace.

The unique FS profile offers optimal protection of the wheel hub.

All functions are available on each lift column.

HIGHLIGHTS IN DETAIL



1 The VARIO fork ensures the accommodation of different tire sizes without additional adapters: from 570-2,000 mm - and, of course, Super-Single

2 Supply batteries are protected behind the cover

3 Hydraulic drawbar is standard


4 Forklift adapters allow quick and easy transport of the mobile column lifts in the workshop

5 The unique FS profile offers optimal protection of the wheel hub

6 Intuitive operation via well-arranged operating elements

7 3-piece composite in combination is possible: Combination of two Big Foot HydroLift columns, one standard HydroLift 6.2/7.5 column and an adapter kit for agricultural vehicles.

HydroLift S2 AGRAR

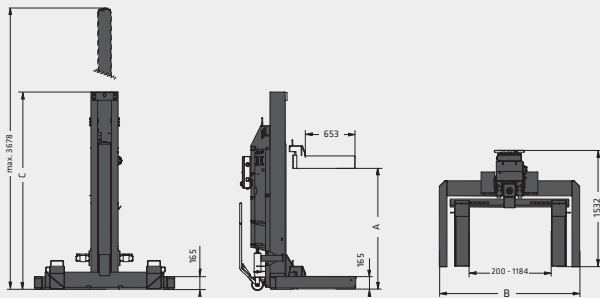

Model	HydroLift S2 AGRAR		
	2-5	4-5	6-5
Lifting capacity per lifting unit	5.000 kg	5.000 kg	5.000 kg
Wheel diameter min.-max.	600-2.000 mm		
A Stroke	1.753 mm	1.753 mm	1.753 mm
Lifting time loaded	78 s		
Lowering time loaded	54 s		
Lift cycles fully loaded	14	14	14
Driving power per cylinder unit	3 kW	3 kW	3 kW
B Width	1.845 mm	1.845 mm	1.845 mm
C Height	2.590 mm	2.590 mm	2.590 mm
Weight per column	865 kg	865 kg	865 kg
Article number	128255	128256	128257

TECHNICAL SPECIFICATIONS

ACCESSORIES



Item No. 120257




Item No. 120204

1 HydroLift S2 kingpin holder,
Load capacity 12.4 t


2 Traverse Load capacity 12.4 t

3 Jet water protective cover
for HydroLift

4 LED lighting Kit (2 pieces) -
also for retrofitting



Item No. 121811Y



Item No. 128478