

LOW-RISE SCISSOR LIFT

3,0 T, ELECTRO-HYDRAULIC

The new short-stroke scissor lift XS30N / XS30N-CAT impresses with its generously dimensioned platform length and width, which ensures that a wide range of vehicles can be

accommodated. It covers the requirements in the field of tire and body service and is ideal for maintenance and work in the vehicle interior.

- + Platform length and width matched to modern SUVs and vans
- + Platform extension - Can be locked with just one hand
- + Stable and secure

The standard CE stop ensures foot protection without a foot guard. This also enables underfloor installation.

To enable flexible pick-up of both small and large vehicles, the XS30N / XS30N-CAT has ramps that can be folded out on both sides, which ensure a total pick-up length of 2150 mm and can be locked in place with one hand. This also ensures that limousines as well as wide SUVs can be accommodated.

The lift is completely assembled and ready for use immediately after connecting the hydraulics without major installation effort.

The ramps with plastic rollers enable low-friction and gentle rolling on the workshop floor.



The lift has a double hydraulic system and two torsion shafts that can hold the load safely in any situation.

HIGHLIGHTS IN DETAIL



1 To enable flexible accommodation of both small and large vehicles, the XS30N / XS30N-CAT has platform extensions that can be folded out on both sides and easily locked.


2 Two independent hydraulic circuits with a total of 4 lifting cylinders make the absence of additional safety patches possible.











3 The XS30N / XS30N-CAT can be set up on any paved surface without foundation work, anchoring to the floor is possible but not necessary. The lift can be easily moved around in the workshop with the supplied mobile kit.

4 The low drive-over height makes it easier to pick up vehicles with less ground clearance.

XS30N / XS30N-CAT

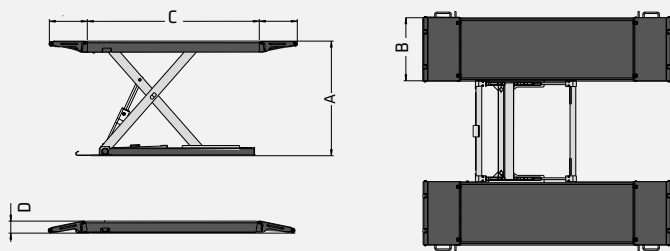


Model	XS30N	XS30N-CAT
Rated load capacity	3.000 kg	3.000 kg
A Stroke	1000 mm	1000 mm
Lifting time loaded	30 s	30 s
Lowering time loaded	20 s	20 s
B Width of runways	530 mm	530 mm
C Length of runways	1.500-2.150 mm	1.500-2.150 mm
D Ascending height Rest height	105 mm	105 mm
Total width	1.980 mm	1.980 mm
Motor power	2.6 kW	2.6 kW
Power supply	230 / 400 V, 50 Hz	230 / 400 V, 50 Hz
Weight	530 kg	530 kg
Article number	ROT.XS30N.193230	ROT.XS30N.193308

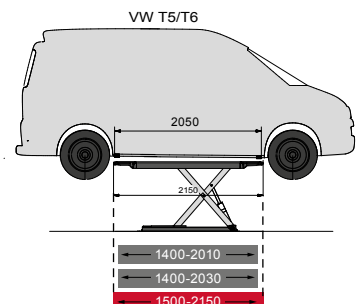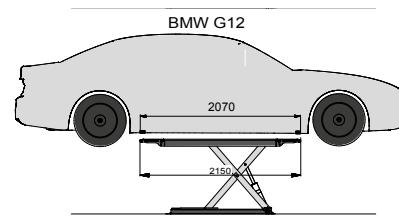


Rotary
Other manufacturers

ACCESSORIES



Item No. T4B



Item No. T4



SPRMP-DS35



Item No. 820117



Item No. XS30NCP014



Item No. XS30NCP003

- Rubber pads
- Rubber pads
- Long ramps
- Crossbar
- Installation box for floor-level installation
- Installation box for floor level installation including installation frame